Spurtan BV

APT

Spurtan® BV

DESCRIPTION

Spurtan BV is 14 mm, two-layer sandwich style polyurethane track system. Its base layer consists of a black mat of SBR rubber granules bond in polyurethane. The second layer is a seal coat using two-component polyurethane and EPDM Powdered Rubber. The surface layer is made up of colored EPDM rubber granules cast into a polyurethane flood coat.

LAYERS

» 10 mm SBR and binder basemat

» One thin seal layer consisting of Qualipur 5050 and EPDM powdered rubber

» 4 mm Qualipur 5050 flooded with EPDM rubber

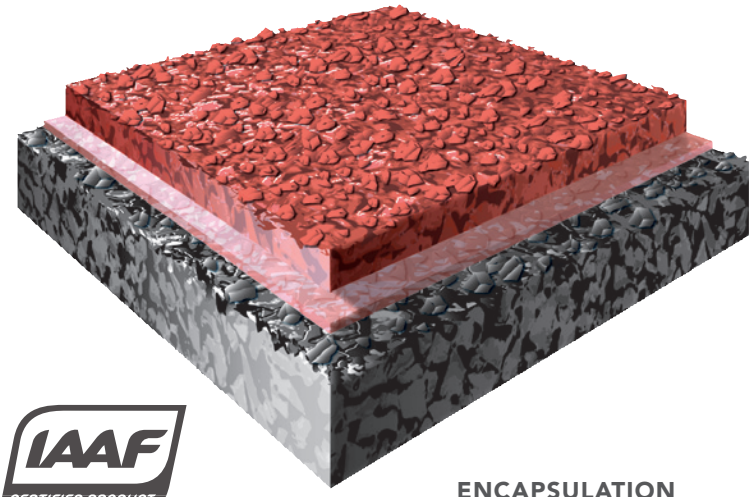

IAAF CERTIFIED PRODUCT

ENCAPSULATION OPTION AVAILABLE

HIGHLIGHTS

» IAAF approved system

» Impermeable, two-component paved in place sandwich style track system

» Provides a high energy return

» Excellent all weather performance and spike resistance

» Free of mercury and lead

» World class performance for training and competition

» Premium colors available upon request

US MERCHANT MARINE ACADEMY **KINGS POINT, NY**	**2013**
THE PACIFIC INSTITUTE OF SPORTS EXCELLENCE **VICTORIA, BC**	**2013**
ALBANY STATE UNIVERSITY **ALBANY, GA**	**2011**
COLLEGE OF THE SEQUOIAS **VISALIA, CA**	**2011**
CALIFORNIA STATE UNIVERSITY **FULLERTON, CA**	**2009**
WESTMINSTER COLLEGE **NEW WILMINGTON, PA**	**2008**
RAMAPO COLLEGE **MAHWAH, NJ**	**2008**

U.S. TRACK & FIELD AND CROSS COUNTRY COACHES ASSOCIATION SUPPORTER

ISO 9001 14001 CERTIFIED

NO TOXIC MERCURY ADDITIVES ECO FRIENDLY

APT

APT

109 Conica Lane
P.O. Box 160
Harmony, PA 16037 USA

Phone: 724.452.1330
Fax: 724.452.1703

Web: sportsbyapt.com